



CAT3TGV3 / 3-TEMPERATURE WINE FRIDGE

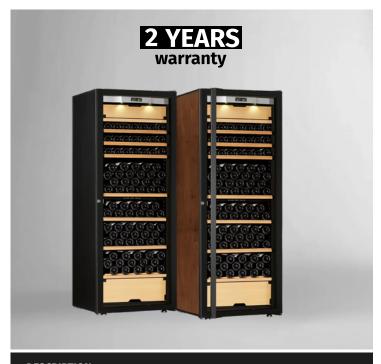

DESCRIPTION

Thanks to its 3 independent temperature zones, Transtherm Castel combines three functions: storing, tempering and

This high-capacity wine cabinet comes with 3 rolling shelves and 3 storing shelves. Using this configuration, the wine cabinet holds 190 bottles*.



720/29

RANGE

Prestige

MODEL

Castel Full glass door

FUNCTION

CAPACITY 190 bottles*

INTERIOR LAYOUT Storing pack

triple-zone

GENERAL FEATURES

Stand Alone fridge (can be built-in according to 3-temperature product: to temper, chill and store wine Full glass door

Black stainless steel handle, removable

Reversible door Lock system

Body colors: Black or Tobacco

2 front feet adjustable

3 sliding shelves in steel with wood front

3 storing shelves in wood

2 isolated compartments in wood

190 Bordeaux bottles capacity

White display

White lighting: 2 Leds under the control panel

Real temperature display

INTERNAL LAYOUT



Sliding shelf ACUPHT 1,8 kg W535xD525xH28mm Steel with front wood up to 12 bottles



Storing shelf AXUHT 1,8 kg/W535xD525xH28mm Solid Beechwood with ecological water varnish up to 77 bottles/100kg

OPTIONAL SHELVES



Presentation shelf ACPHT 1.8 kg/W535xD535xH110mm Solid Beechwood with ecological water varnish up to 22 bottles

TECHNICAL FEATURES

| Electronic regulation | plastic grey, with sensitive touch |
|---|--|
| Tempering compartment capacity | 11 bottles* |
| Setting range for tempering compartment | From 15°C / 59°F to 20°C / 68°F |
| Setting range for the main compartment | From 9°C / 48°F to 15°C / 59°F |
| Chlling compartment capacity | 14 bottles* |
| Setting range for chilling compartment | Induced by the one of the main compartment |
| Default temperature setpoint | 12°C / 54°F (main compartment) 18°C / 64°F (temper compartment) |
| Unit temperature setting | °C or °F |
| Lighting regulation | OFF/ON/At door opening |
| Alarms | Visual |
| Type of alarms | Temperature, sensor default |
| Ambient operating temperature | Between 12°C/ 54°F and 30°C/86°F |
| Climate class | SN-T |
| Winter mode | Yes, automatic |
| Energy consumption class | G |
| Annual energy consumption | 176 kWh/year |
| Sound Emmission level | 37 dB(A) |
| Sound Emission class | С |

FUNCTIONALITY AND STRUCTURE

| Useful volume | 446 L |
|--------------------------------------|---|
| Cold production | Static |
| Compressor | R600a Gas |
| Heat release | Heater |
| Inner material | Aluminium |
| Exterior coating material | Hight pressure laminates panels HPL |
| Insulaions type | polyurethan foam (59mm) |
| Maximumm capacity | 209 |
| Interior layout for maximum capacity | 3 storing shelves |
| Packed product dimensions | H 1910 x W 733 x D 768 mm H 75 x W 29 xD 30 inch |
| Product dimensions | H 1825 x W 680 x D 720 mm H 72 x W 27 xD 29 inch |
| packed product weight | 106 kg |
| Net weight | 97 kg |
| Country of origin | France |